



## Vgradni aparat "EVESYS"


Tehnični podatki	
Nazivna napetost $U_n$	230/400V AC, 24V DC
Nazivni tok $I_n$	16A, 25A
Nazivna frekvenca $f_n$	50/60 Hz
Priključne sponke	1x6mm <sup>2</sup> / 2x2,5mm <sup>2</sup> , max 1Nm
Električna izolacija	>3mm contact space
Nazivni tok izklopa	1,25I <sub>n</sub> / 1,1 U <sub>n</sub> , cosφ=0,6
Pogojna kratkostična zmogljivost	10kA, 400V, cosφ=0,6 (for Switch)
Stopnja zaščite	IP20
Širina stikala	18mm
Standard	IEC/EN 60947-1, IEC/EN 60947-3

Stikalo



**SG 116**    **SG 216**    **SG 316**    **SG 416**

Stikalo s kontrolno lučko




**SLG 116**    **SLG 216**    **SLG 316**

**SG 125**    **SG 225**    **SG 325**    **SG 425**

**SLG 125**    **SLG 225**    **SLG 325**


Izmenično stikalo


**ISG 116**    **ISG 216**


Skupinsko stikalo

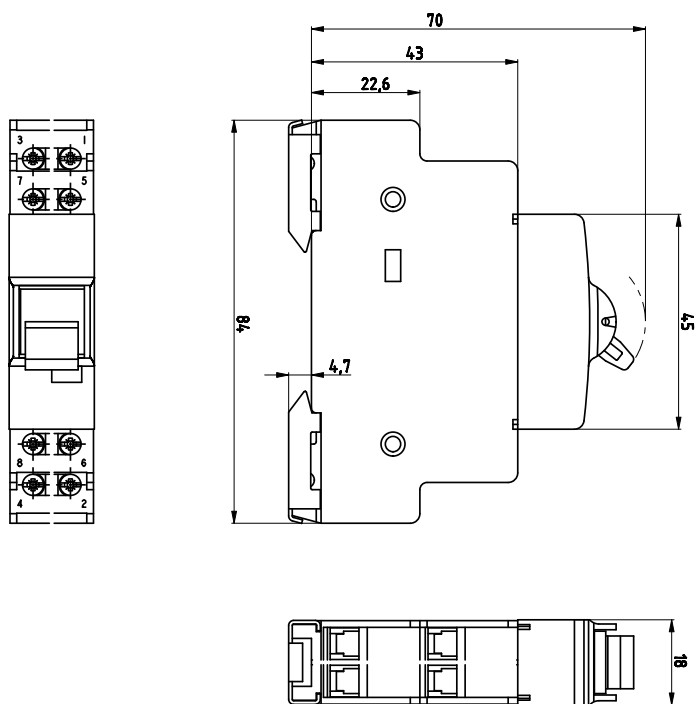

**SSG 116**    **SSG 216**

**ISG 125**    **ISG 225**

**SSG 125**    **SSG 225**

Tipkalo

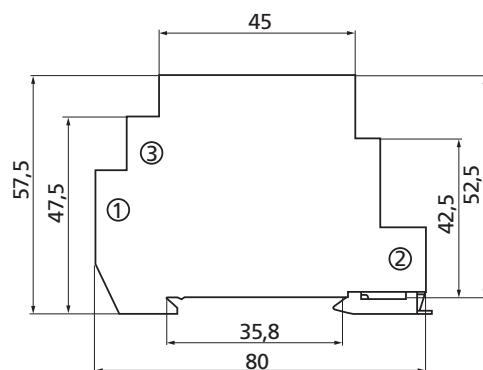

**TG 216**

Signalna lučka

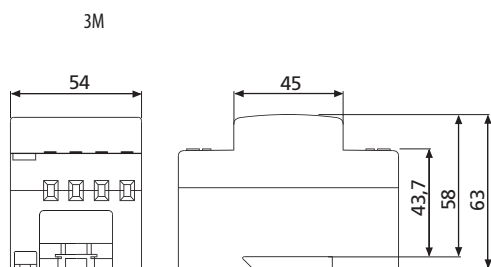

**TLG 216**



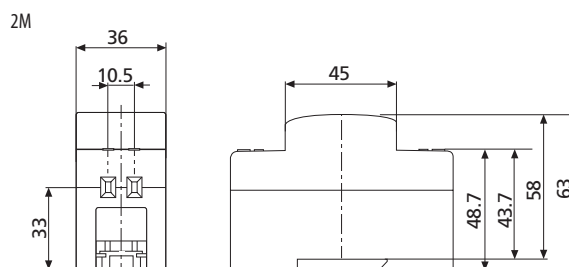
Stikalo, Stikalo s kontrolno lučko, Izmenično stikalo, Skupinsko stikalo, Tipkalo, Tipkalo s kontrolno lučko, Signalna lučka



Zvonec/brač



Zvončni transformator tip 3M



Zvončni transformator tip 2M

