

ROBUS®

INDUSTRIAL

SONIC MULTIBAY

100-200W, IP65



PRODUCT INFORMATION DOCUMENT

CONSTRUCTION

- Die cast aluminium powder coated housing
- Polycarbonate diffuser
- 1m rubber flex

FEATURES


- Selectable power from 100W to 200W to allow use in any application
- Design and high-quality materials providing very good environment and impact protection
- Dimmable with most of 1-10V systems
- Suspended mounting or surface mounting using RSNB4-L accessory



RSNX40DA-04	
Comparable to:	200-400W metal halide
Total Power (W):	93.2/117.8/146.8/195.8
Total Light Output (lm):	15,910/19,740/23,940/30,530
Total Emergency Light Output (lm):	NA
Efficacy (lm/cctW):	170/167/163/155
Lux at 1m (lux):	5,650/7,020/8,510/10,870
Emergency Lux at 1m (lux):	NA
CCT (K):	4,000
CRI:	85
IP:	65
Operation Temperature (°C):	-25 ≤ Ta ≤ +45
Inrush Current:	16A/112us
RG Value:	0
L70B50 or the variant:	>54,000
Dimensions ØxH:	306x213
Weight (kg):	3.62


ACCESSORIES:

RSNB4-L Surface Mounting Bracket

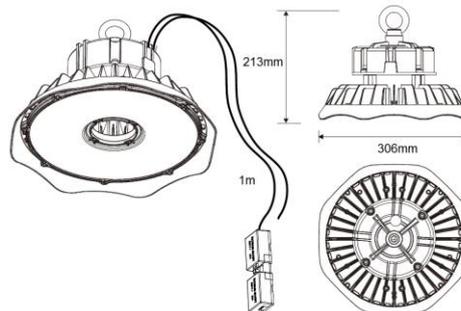

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

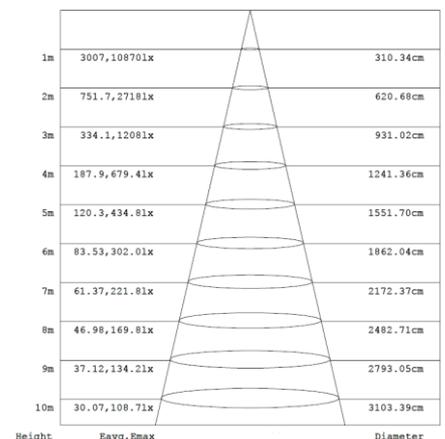

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

Diagram for for RSNX40DA-04 in 200W. Other diagrams available on request

IRE: TEL: +353 1 709 9000
 UK: TEL: 0800 973 220
 AUS: TEL: +61 7 3890 5444
 NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
 WEB: ROBUS.COM
 WEB: ROBUS.COM.AU
 WEB: ROBULED.CO.NZ

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA