


Pribor


Izolirane zbiralnice

Nazivna napetost	max. 500V
Dielektrična moč	2,5 kV
Izolirna upornost	> 5 MΩ (DIN 53482)
Temperaturni razpon	-20°C do + 50°C
Glow wire test	850°C (IEC 695-2-1)
Samougasljivost	V-0
Standard	EN 60947-7-1


preseki	nazivni tok (A)
10 mm ²	63
12 mm ²	80
16 mm ²	100

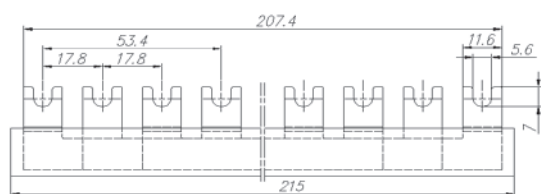


IZ16_3F_12

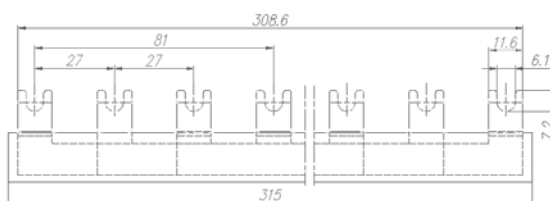



IZ16_3F_12_STV

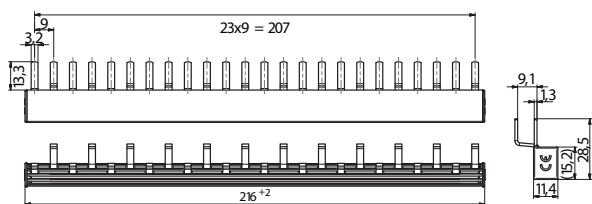

SKN0021

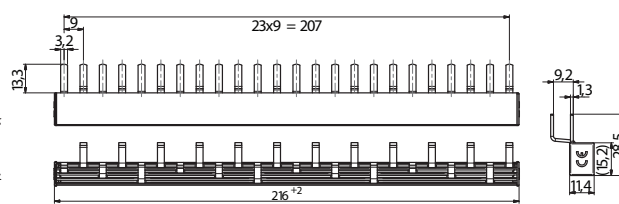

SKN0029

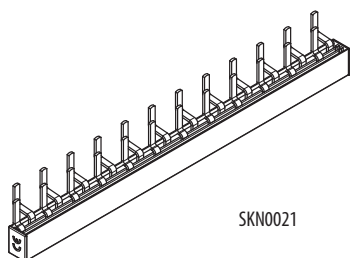

Sponka za zaščitne vodnike

tip	dolžina [m]	dovod [mm ²]	odvod [mm ²]
2/6	0,056	2 x 22	6 x 14
2/8	0,086	2 x 22	8 x 14
2/12	0,092	2 x 22	12 x 14
2/18	0,128	2 x 22	18 x 14

Izolirana sponka za zaščitne vodnike

tip	dolžina [m]	dovod [mm ²]	odvod [mm ²]
2 x 2/6	0,265	4 x 22	12 x 14
2 x 2/8	0,265	4 x 22	16 x 14
2 x 2/12	0,265	4 x 22	24 x 14
2 x 2/18	0,265	4 x 22	36 x 14