DMED112

ENERGY METER, SINGLE PHASE, NON EXPANDABLE, DIGITAL WITH LCD DISPLAY, 40A DIRECT CONNECTION, 1U, M-BUS INTERFACE, MULTI-MEASUREMENTS, 220...240VAC




Product designation			Sigle-phase energy meters
Product type designation			DMED112
Type			Sigle-phase
DIN rail module number			1
Auxiliary supply Us			
Operational frequency			
	min	Hz	50
	max	Hz	60
Power consumption			
	Max	VA	1
Power dissipation Max		W	0.4
Measuring voltage inputs			
Rated voltage (Ue)			
	phase-neutral	VAC	110…240
Operating voltage range			
	phase-neutral	VAC	93…264
Connection method			Direct
Current			
IEC maximum (Imax)		A	40
IEC minimum (Imin)		A	0.25
IEC rated (Iref-lb)		A	5
IEC start (Ist)		mA	20
Transition (Itr)		A	0.5
Accuracy			
Measurement conditions (T +23°C ±1°C / Rel. Humidity 45 ±15% R.H.)			
	active energy		Class 1/B
	reactive energy		Class 2 (IEC/EN 62053-23)
Output characteristics			
LED Pulse rate		pulse/kWh	1000
LED Pulse duration		ms	30
Static output pulse rate		pulse/kWh	1-10-10-1000 programmable
Static output pulse duration		ms	100
Static output external voltage		VDC	10...30
Static outputs Maximum current		mA	50
Insulations			
Rated insulation voltage Ui IEC/EN		V	250
Rated impulse withstand voltage Uimp		kV	6
Operating frequency withstand voltage		kV	4
Mechanical features			
Housing type			Polyamide
Terminals type			Fixed
Conductor cross section			


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding


		min	mm²	1.5
		Max	mm²	10
		min	AWG	16
		Max	AWG	6
Tightening torque (Max)				
			Nm	1.5
			lbin	14
Fixing				DIN rail
Weight			g	90
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+55
	Storage temperature			
		min	°C	-25
		max	°C	+70
Relative humidity			%	<80
Maximum Pollution degree				2
Mechanical environment				Class M1
Magnetic environment				Class E1

Dimensions

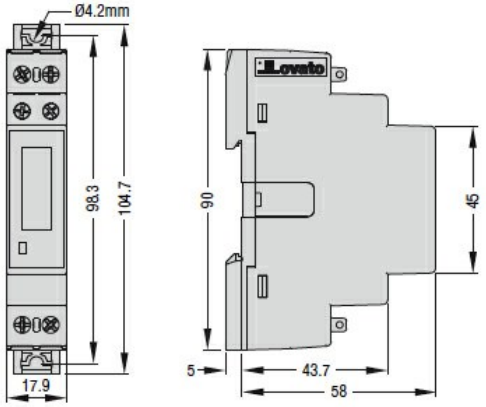

Wiring diagrams

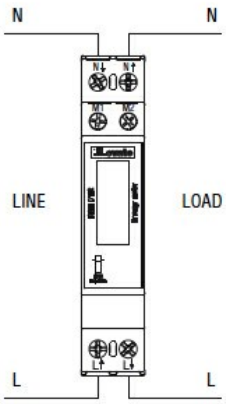

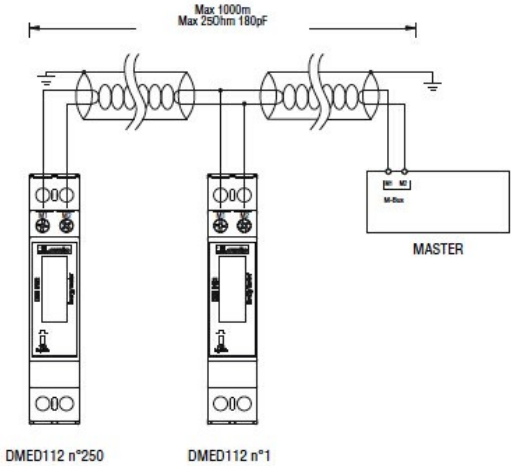

Certifications and compliance

Compliance

IEC/EN 61000-6-2

IEC/EN 61000-6-3

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

	IEC/EN 61010-1
Certificates	
	CB
	RCM

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding