


PHILIPS

Ledinaire nadgradna svetilka

SM060C

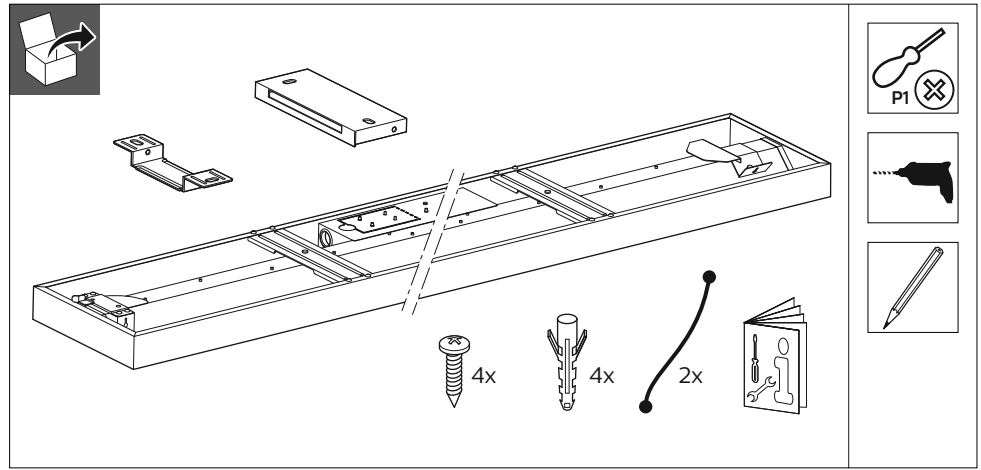

50Hz
60Hz

220V
240V

LIFE
L70B50
30K hrs

IP20


IK03

Max.
40 °C
Min.
10 °C


GLOW
WIRE
650 °C



| | Izhodni svetlobni tok | CCT | Napajalnik | Moč(W) | kg |
|-------------------------------|-----------------------|-------|------------|--------|-----|
| SM060C LED32S/830 PSU W20L120 | 3200lm | 3000K | PSU | 36 | 2.8 |
| SM060C LED32S/840 PSU W20L120 | | 4000K | | | |

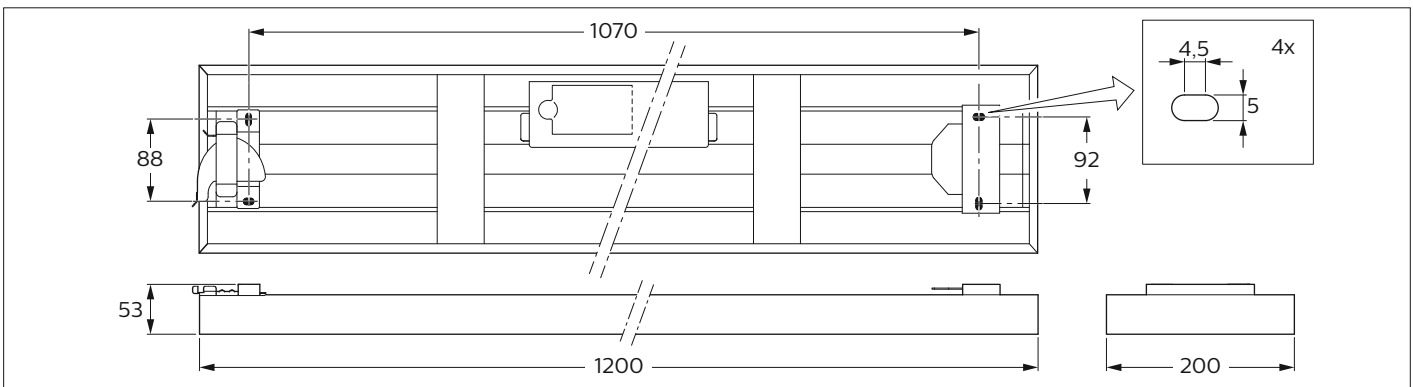

Zagonski tok

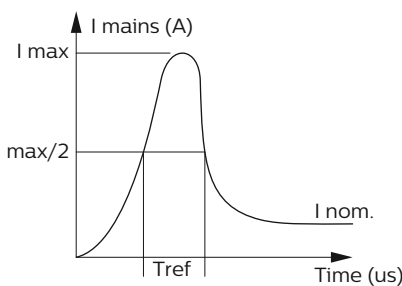

| LED34S | |
|---------------------------|----------------------|
| Električne karakteristike | |
| Inom(mA) | 240 |
| I max(A) | 5,3 |
| Tref(µs) | 70 |
| MCB | Max. število svetilk |
| B-10A | 15 |
| B-16A | 24 |
| C-10A | 24 |
| C-16A | 40 |



- Svetilko mora vgraditi kvalificiran električar v skladu z veljavnimi standardi

- LED modul in napajalnik nista zamenljiva in jih ni možno servisirati



OPOZORILO
PREVIDNO ROKOVANJE
ELEKTROSTATIČNO
OBČUTLJIVA
NAPRAVA

