


PHILIPS

Ledinaire panelna svetilka

RC065B/RC066B OC

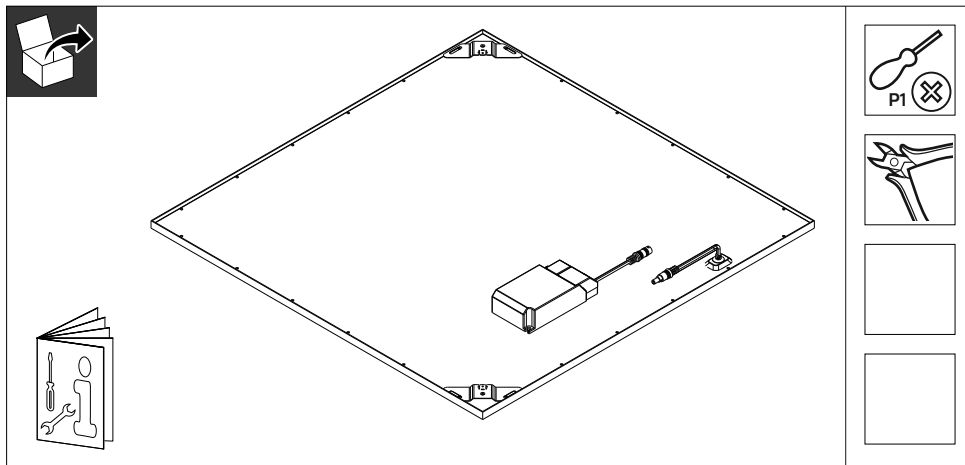

220V
240V

50Hz
60Hz



IP20

Ta
25 °C

IK02

Max.
40 °C
Min.
10 °C

GLOW
WIRE
650 °C





	Moč (W)	L x W x H (mm)	Lumen (lm)	CCT (K)	kg
RC065B W60L60 OC	38	597x597x44	3400	4000	2.55
RC066B W62L62 OC	38	622x622x44	3400	4000	2.7

Optional:

Obešala:

RC125Z SME-2 WH
910930031418



Set za površinsko nameščanje:

RC125Z SMB W60L60
910930031018





Set za mavčni strop:

RC125Z SMB-PLC
910930031318




Varnostni kabel:

RC125Z SC
910930031518

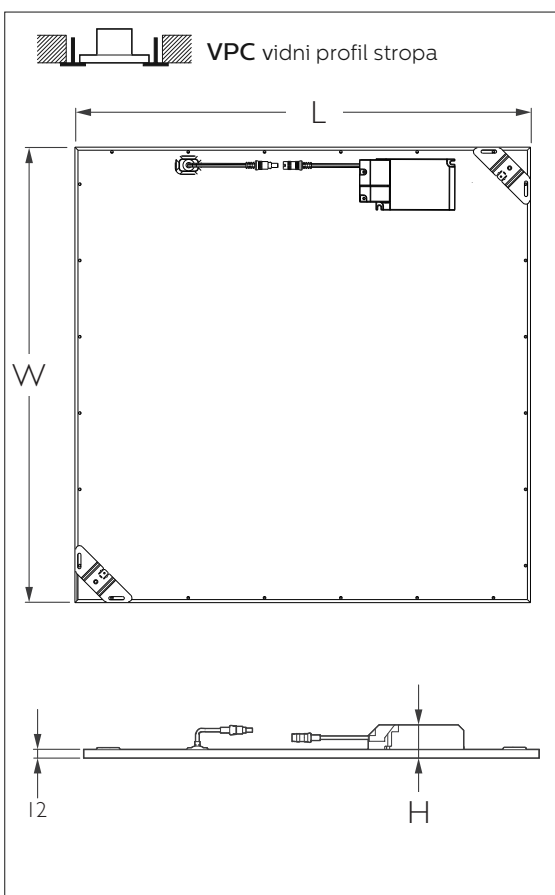


Svetilka v nobenem primeru ne sme biti pokrita z izolacijskim pokrovom ali podobnim materialom!

Svetlobni vir te svetilke ni zamenljiv; ko svetlobni vir doseže konec življenjske dobe, se zamenja celotna svetilka.

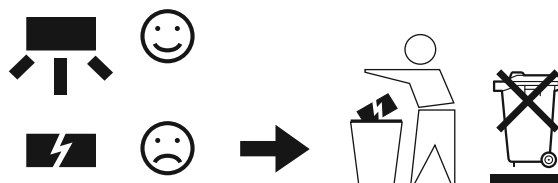

Zagonski tok

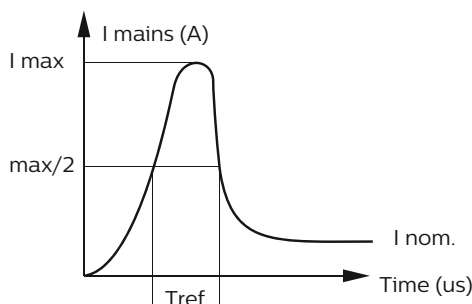

Električne karakteristike	
I _{max} (A)	5
T _{ref} (μs)	55
MCB	Max. število svetilk
B-10 A	25
B-13 A	32
B-16 A	40
C-10 A	40
C-13 A	54
C-16 A	68

